

(1) CERTIFICATE

- (2) No. of the Certificate: **ZP/B210/18-PZ**
- (3) Product: **Anchor device type A
Type: ABS-Lock® Falz-H**
- (4) Manufacturer: **ABS Safety GmbH**
- (5) Address: **Gewerbering 3, 47623 Kevelaer, Germany**
- (6) The design of this product and any acceptable variation thereto are specified in the appendix to this certificate.
- (7) The Certification Body of DEKRA EXAM GmbH certifies that this product comply with the requirements of the test regulations listed under item 8 below. The test results are recorded in test report PB 18-212.
- (8) The requirements are assured by compliance with
DIN EN 795:2012 DIN CEN/TS 16415:2017
- (9) This certificate relates only to the design and tests of the specified product in accordance to the contemplated requirements. Further requirements applied to the manufacturing process and supply of this product, are not covered by this certificate.
- (10) The manufacturer is authorized to apply the mark of conformity to the products that conform to the types examined.
- (11) This certificate is valid until 2023-09-30.




DEKRA EXAM GmbH
Bochum, 2018-10-01


Signed: Wiegand
Certification Body

Signed: Mühlenbruch
Special services unit

We confirm the correctness of the translation from the German original.
In the case of arbitration only the German wording shall be valid and binding.

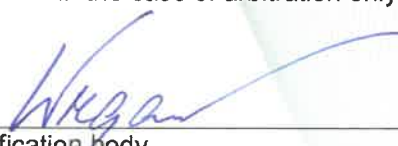

Certification body

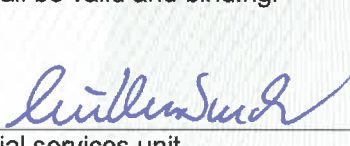

Special services unit

TRANSLATION

- (12) Appendix to
- (13) **Certificate**
ZP/B210/18-PZ
- (14) 14.1 Subject and type
Anchor device type A
Type: ABS-Lock® Falz-H

14.2 Description

The anchor device, type: ABS-Lock® Falz-H (Fig. 1) serves to protect a maximum of three persons against falls from a height. The assembly takes place on wooden materials with sufficient strength.

The round base body with an outer diameter of 234.6 mm has 15 holes (Ø 6.5 mm) around it to accommodate the fastening elements. In the middle of the anchor device a folded, rotatable plate (t = 3 mm) with two round recesses is mounted. One hole (Ø 16.2 mm) is used to hold the M16 hexagon screw and the connection to the base body.

At the other hole (Ø 30 mm) the user can protect himself against falls from a height with his personal protective equipment.

The anchor device is made of corrosion-resistant material and is intended for a load parallel to the building surface.

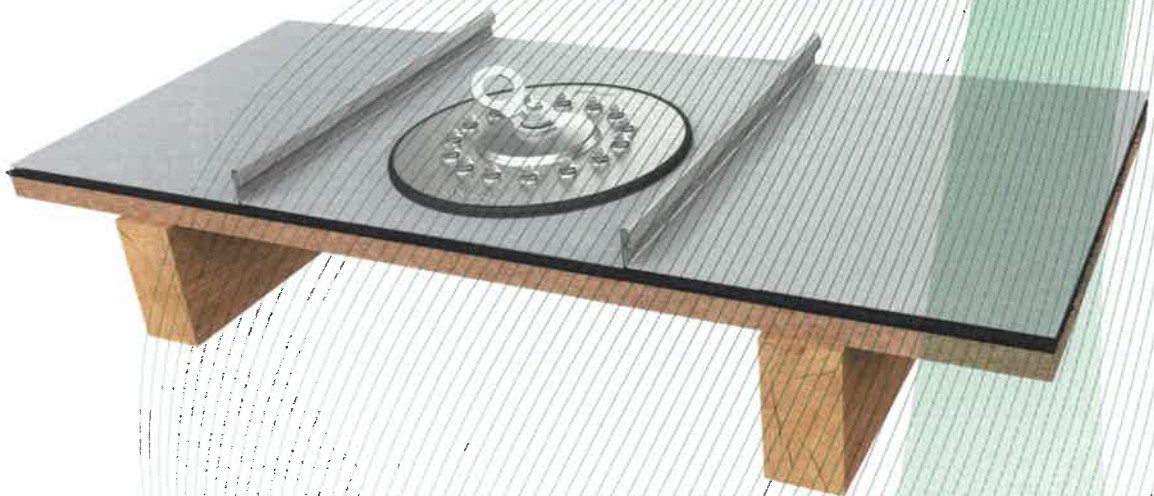


Fig. 1: Anchor device, type: ABS-Lock® Falz-H

- (15) Test Report

PB 18-212 dd. 2018-10-01