

(1) CERTIFICATE

- (2) No. of the Certificate: **ZP/B102/20-PZ** replaces ZP/B037/15
- (3) Product: **Anchor device type A**
Type: ABS-Lock® Falz-III
- (4) Manufacturer: **ABS Safety GmbH**
- (5) Address: **Gewerbering 3**
47623 Kevelaer
Germany
- (6) The design of this product and any acceptable variation thereto are specified in the appendix to this certificate.
- (7) The Certification Body of DEKRA Testing and Certification GmbH certifies that this product complies with the requirements of the test regulations listed under item 8 below. The test results are recorded in report PB 20-042.
- (8) The requirements are assured by compliance with
DIN EN 795:2012
- (9) This certificate relates only to the design and tests of the specified product in accordance to the contemplated requirements. Further requirements applied to the manufacturing process and supply of this product, are not covered by this certificate.
- (10) The manufacturer is authorised to apply the mark of conformity to the products that conform to the types examined.
- (11) This certificate is valid until 2025-05-19.



DEKRA Testing and Certification GmbH
Bochum, 2020-05-20

Signed: Kilisch
Managing director

We confirm the correctness of the translation from the German original.
In the case of arbitration only the German wording shall be valid and binding.


Managing director

TRANSLATION

- (12) Appendix to
- (13) **Certificate**
ZP/B102/20-PZ
- (14) 14.1 Subject and type
Anchor device type A
Type: ABS-Lock® Falz-III

14.2 Description

The anchor device, type: ABS-Lock® Falz-III (Fig. 1) serves as a single anchor point to protect a maximum of one person against falls from a height. The anchor device is assembled on profile roofing membranes with sufficient strength.

The base body of the anchor device consists of aluminum, which is adapted to the contour of the profile roofing membrane. The attachment to the mounting surface is being realized by jamming. A freely rotatable eyelet made of folded sheet metal ($t = 0,7 \text{ mm}$) is mounted on the base body using an M10 hexagon screw.

The user connects his personal protective equipment to the attachment eyelet to protect himself against falls from a height.

The anchor device is suitable for bearing loads from any direction parallel to the building surface and consists of corrosion-resistant material.

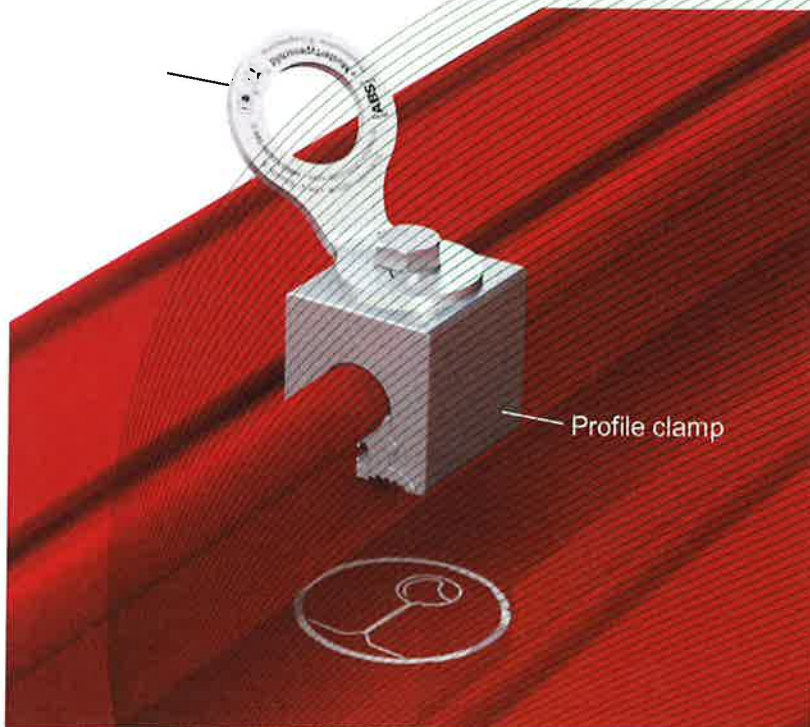


Fig. 1: Anchor device, type: ABS-Lock® Falz-III (mounting example)

- (15) Report
PB 20-042, 2020-05-20