

(1) CERTIFICATE

(2) No. of the Certificate: **ZP/B123/21-PZ**

(3) Product: **Anchor device type A
Type: ABS-Lock® Falz V**

(4) Manufacturer: **ABS Safety GmbH**

(5) Address: **Gewerbering 3
47623 Kevelaer
Germany**

(6) The design of this product and any acceptable variation thereto are specified in the appendix to this certificate.

(7) The Certification Body of DEKRA Testing and Certification GmbH certifies that this product complies with the requirements of the test regulations listed under item 8 below. The test results are recorded in report PB 21-128.

(8) The requirements are assured by compliance with

DIN EN 795:2012

DIN CEN/TS 16415:2017

(9) This certificate relates only to the design and tests of the specified product in accordance to the contemplated requirements. Further requirements applied to the manufacturing process and supply of this product, are not covered by this certificate.

(10) The manufacturer is authorised to apply the mark of conformity to the products that conform to the types examined.


(11) This certificate is valid until 2026-09-28.



DEKRA Testing and Certification GmbH
Bochum, 2021-09-29

Signed: Kilisch
Managing director

We confirm the correctness of the translation from the German original.
In the case of arbitration only the German wording shall be valid and binding.


Managing director

TRANSLATION

(12) Appendix to

(13) **Certificate**
ZP/B123/21-PZ

(14) 14.1 Subject and type
Anchor device type A
Type: ABS-Lock® Falz V

14.2 Description

The anchor device of type ABS-Lock® Falz V (Fig. 1) is used to protect maximum three people against falls from a height. It is intended for being mounted on the standing seams of seam profiles of sufficient strength.

The anchor device is fastened on the roof profiles by means of two aluminium profile clamps, each of two parts, which are adjusted to the contour of the standing seams. Those are fastened by two headless screws for each profile clamp.

The base rail of the anchor device is made of an edged sheet ($t = 2 \text{ mm}$) of 400 mm length. The base rail and the profile clamps are connected by means of a hexagonal screw (M10) each with the pertinent hexagonal nut and spring washer.

To protect himself against falls from a height, the user connects his personal protective equipment to the securely screw-fastened (M10) attachment eyelet made of steel sheet ($t = 3 \text{ mm}$); the eyelet has an external diameter of 50 mm and an internal diameter of 30 mm.

The anchor device is intended for bearing loads being exerted from any direction parallel to the structure surface; it is made of corrosion-resistant material.

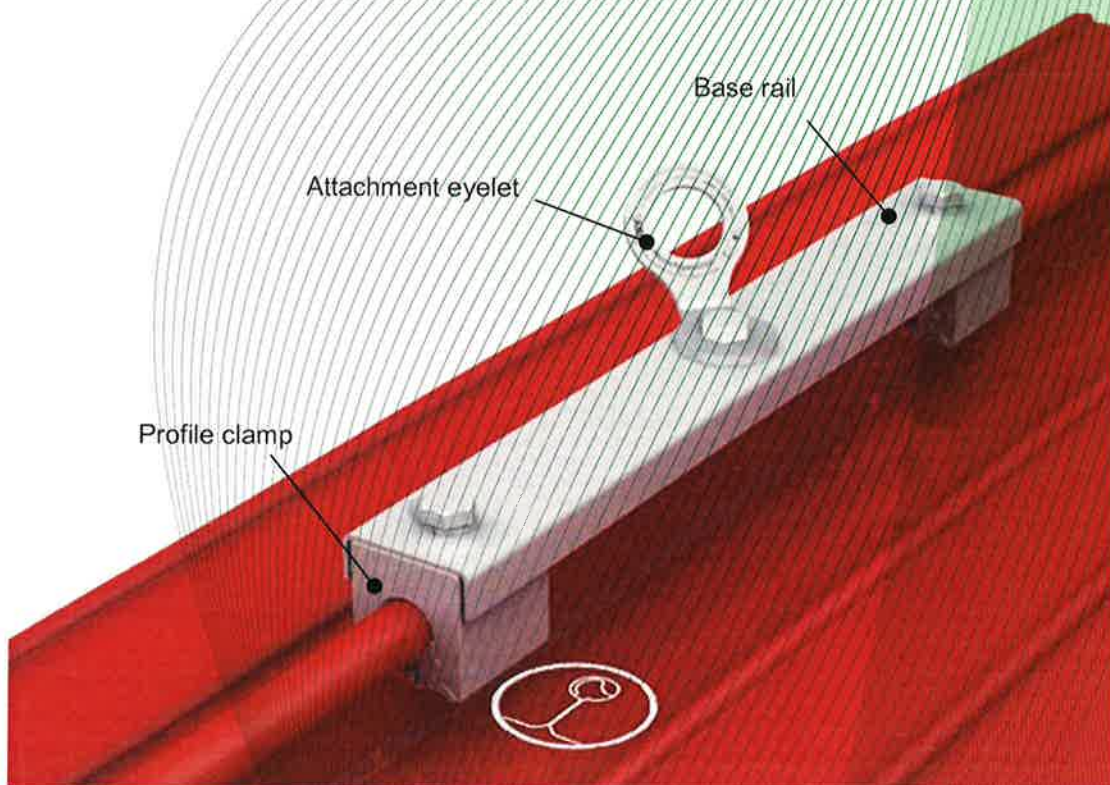


Fig. 1: Anchor device, type ABS-Lock® Falz V with profile clamp for rounded-edge seams (assembly example)

(15) Report

PB 21-128, 2021-09-29