

# (1) CERTIFICATE

(2) No. of the Certificate: **ZP/B071/24-PZ** replaces ZP/B179/19-PZ

(3) Product: **Anchor device type A**  
**Type: ABS-Lock X-Flat**

(4) Manufacturer: **ABS Safety GmbH**

(5) Address: **Gewerbering 3**  
**47623 Kevelaer**  
**Germany**

(6) The design of this product and any acceptable variation thereto are specified in the appendix to this certificate.

(7) The Certification Body of DEKRA Testing and Certification GmbH certifies that this product complies with the requirements of the test regulations listed under item 8 below. The test results are recorded in report PB 24- 069.

(8) The requirements are assured by compliance with

**DIN EN 795:2012**

**DIN CEN/TS 16415:2017**

(9) This certificate relates only to the design and tests of the specified product in accordance to the contemplated requirements. Further requirements applied to the manufacturing process and supply of this product, are not covered by this certificate.

(10) The manufacturer is authorised to apply the mark of conformity to the products that conform to the types examined.

(11) This certificate is valid until 2029-04-25.



DEKRA Testing and Certification GmbH  
Bochum, 2024-04-26

Signed: Brumm  
Managing director

We confirm the correctness of the translation from the German original.  
In the case of arbitration only the German wording shall be valid and binding.

A handwritten signature in blue ink, appearing to read 'A. Brumm', written over a horizontal line.

Managing director

## TRANSLATION

- (12) Appendix to
- (13) **Certificate**  
**ZP/B071/24-PZ**
- (14) 14.1 Subject and type  
Anchor device type A  
Type: ABS-Lock X-Flat

### 14.2 Description

The anchor device, type: ABS-Lock® X-Flat (Fig. 1) serves to secure a maximum of three persons against falling simultaneously. The device is mounted on a sufficiently firm surface.

The base plate (t = 3 mm) with the dimensions 362 mm x 200 mm or 290 mm x 200 mm is made of corrosion-resistant steel. The anchorage device is fastened to the solid substrate by means of holes (Ø 5.7 mm) in the base plate and the corresponding fastening elements in the form of rivets.

Alternatively, the fastening is carried out using holes (Ø 5.5 mm) in the base plate and the corresponding fastening elements in the form of countersunk screws (M5).

An eyelet is fitted on each of the two sides. At these eyelets the user can secure himself against falling with the PPE carried along. The anchor device is intended for use parallel to the building surface.

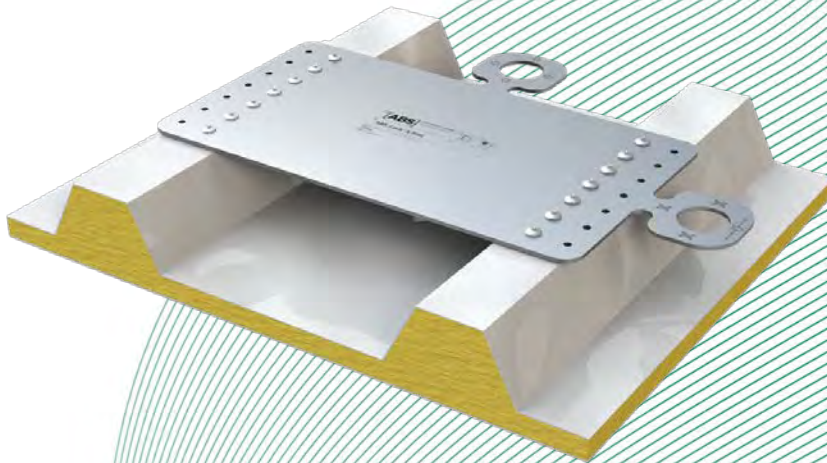


Fig. 1: Anchor device, type: ABS-Lock® X-Flat (riveted)

- (15) Report  
PB 24-069, 26.04.2024