

# (1) CERTIFICATE

(2) No. of the Certificate: **ZP/B266/19-PZ**

(3) Product: **Anchor device type A  
Type: ABS-Lock® X-SW-6**

(4) Manufacturer: **ABS Safety GmbH**

(5) Address: **Gewerbering 3  
47623 Kevelaer, Germany**

(6) The design of this product and any acceptable variation thereto are specified in the appendix to this certificate.

(7) The Certification Body of DEKRA Testing and Certification GmbH certifies that this product complies with the requirements of the test regulations listed under item 8 below. The test results are recorded in report PB 19-319.

(8) The requirements are assured by compliance with

**DIN EN 795:2012**

**DIN CEN/TS 16415:2017**

(9) This certificate relates only to the design and tests of the specified product in accordance to the contemplated requirements. Further requirements applied to the manufacturing process and supply of this product, are not covered by this certificate.

(10) The manufacturer is authorised to apply the mark of conformity to the products that conform to the types examined.

(11) This certificate is valid until 2025-03-15.



DEKRA Testing and Certification GmbH  
Bochum, 2020-03-16

Signed: Kilisch  
Managing director

We confirm the correctness of the translation from the German original.  
In the case of arbitration only the German wording shall be valid and binding.

Managing director



## TRANSLATION

- (12) Appendix to
- (13) **Certificate**  
**ZP/B266/19-PZ**
- (14) 14.1 Subject and type  
Anchor device type A  
Type: ABS-Lock® X-SW-6

### 14.2 Description

The anchor device of type ABS-Lock® X-SW-6 (Fig. 1) is used to protect a maximum number of three people against falls from a height. The device is to be mounted onto roof sandwich elements made of wood or steel profiles of sufficient strength. The base plate of the anchor device consists of a rectangular base plate (135 mm x 376 mm) which is fastened at both ends to the roof profiles using three drilling screws each. Centrally to the base plate, a support (M16) made of round steel is bolted; the support is between 150 mm and 400 mm long and of a diameter of 16 mm. At the top end of the support there is a ring-shaped eyelet screw-fastened by means of a lock nut. The users can protect himself from falling by connecting their own personal protective equipment to the eyelet. The anchor device is made of corrosion-resistant steel and intended for bearing loads from any direction parallel to the structure surface.

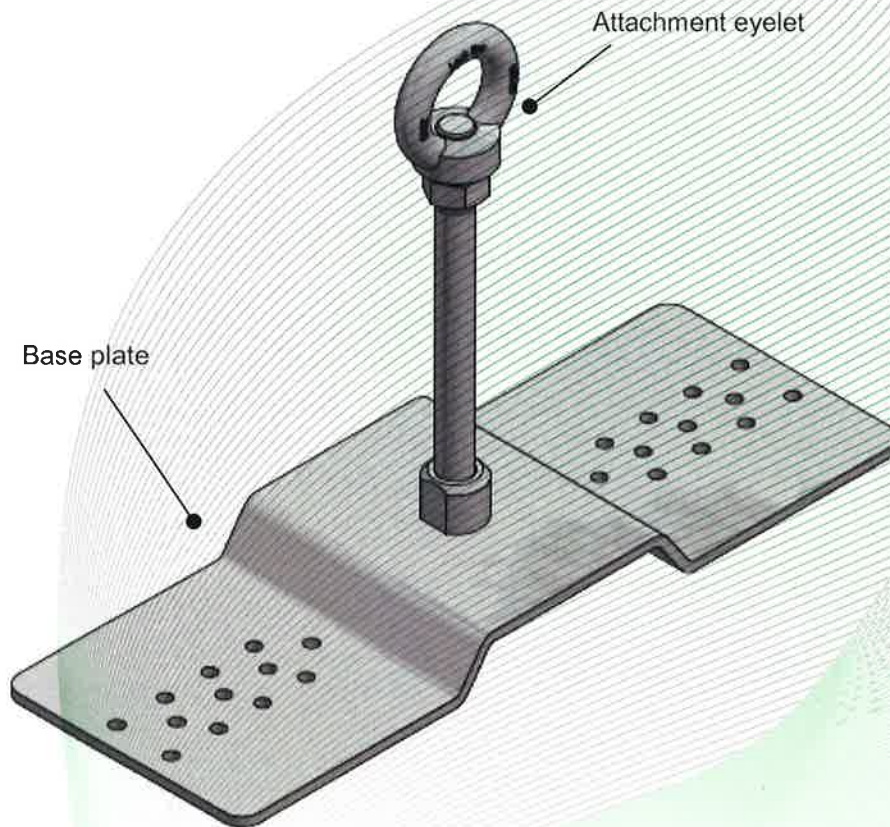


Fig. 1: anchor device type, type: ABS-Lock® X-SW-6

- (15) PB 19-319, 2020-03-16