

# (1) Type Examination Certificate

(2) No. of the Type Examination Certificate: **ZP/B013/23** replaces ZP/B121/22

(3) Product: **Bridging step  
Type: ABS Überstieg**

(4) Manufacturer: **ABS Safety GmbH**

(5) Address: **Gerwerbering 3  
47623 Kevelaer  
GERMANY**

(6) The design of this product and any acceptable variation thereto are specified in the schedule to this Type Examination Certificate.

(7) The certification body of DEKRA Testing and Certification GmbH certifies that this product complies with the fundamental requirements of the standard listed under item 8 below. The examination and test results are set out in the report PB 23-013.

(8) The requirements of the standard are assured by compliance with

**DIN EN ISO 14122-3:2016**

(9) This Type Examination Certificate relates only to the design, examination and tests of the specified product in accordance to the standard list. Further requirements of the Directive apply to the manufacturing process and supply of this personal protective equipment. These are not covered by this certificate.


(10) This Type Test Certificate is valid until 2027-07-19.

DEKRA Testing and Certification GmbH  
Bochum, 2023-01-27

signed: Krökel  
\_\_\_\_\_  
Managing director

---

We confirm the correctness of the translation from the German original.  
In the case of arbitration only the German wording shall be valid and binding.

  
\_\_\_\_\_  
Managing director



## TRANSLATION


- (11) Appendix to
- (12) **Type Examination Certificate**  
**ZP/B013/23**
- (13) 13.1 Subject and Type  
Bridging step  
Type: ABS Überstieg

### 13.2 Description

The fixed bridging step, type: ABS Überstieg, ensures safe passage over obstacles such as firewalls, pipelines and similar. The step is manufactured from aluminium profiles and gratings and can optionally be fitted with handrails made from Ø 30 mm aluminium tube to provide added protection against falling (Figures 1 – 2).

The bridging step should only be installed on surfaces having sufficient load bearing capacity. The maximum platform height is set at 1600 mm with up to seven step levels.

The relevant design limits are set out in the product specification below (see Table 1).

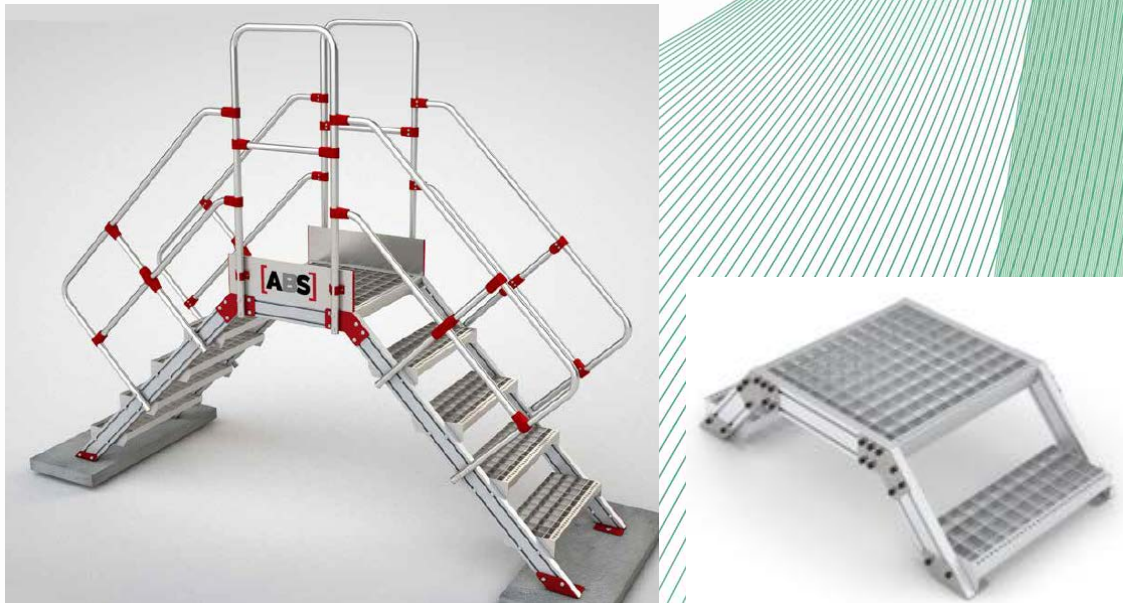

Figures 1 – 2: Bridging step, type: ABS Überstieg with optional handrails (left) and basic version without handrails (right)

Table 1: Product specification and design limits

Detail	ABS Überstieg
Number of steps	1 – 7
Maximum platform height	1.6 m
Maximum platform size	0.66 m x 1.0 m

- (14) Report

PB 23-013 dd. 2023-01-27